

# Product data sheet

Specifications



contactor, TeSys F, 3P(3NO), AC-3,  
<=440V 780A, coil 110V AC

LC1F780F7

⚠ To be discontinued on: Dec 31, 2025

⚠ End-of-service on: Sep 13, 2024

⚠ To be discontinued

Product availability: Non-Stock - Not normally stocked in distribution facility

## Main

|                                |   |
|--------------------------------|---|
| Range                          | TeSys   |
| Range of Product               | TeSys F   |
| Product or Component Type      | Contactor   |
| Device short name              | LC1F  |
| Contactor application          | Resistive load<br>Motor control   |
| Utilisation category           | AC-4<br>AC-1<br>AC-3  |
| Poles description              | 3P  |
| [Ue] rated operational voltage | <= 1000 V AC 50/60 Hz<br><= 460 V DC  |
| [Uc] control circuit voltage   | 110 V AC 40...400 Hz  |
| [Ie] rated operational current | 1600 A (at <104 °F (40 °C)) at <= 440 V AC AC-1<br>780 A (at <131 °F (55 °C)) at <= 440 V AC AC-3 |

## Complementary

|   |  |
|---|--|
| [Uimp] rated impulse withstand voltage      | 8 kV   |
| [Ith] conventional free air thermal current | 1600 A (at 104 °F (40 °C))   |
| Rated breaking capacity                     | 6240 A conforming to IEC 60947-4-1   |
| [Icw] rated short-time withstand current    | 3000 A 104 °F (40 °C) - 3 min<br>6250 A 104 °F (40 °C) - 10 s<br>5600 A 104 °F (40 °C) - 30 s<br>4600 A 104 °F (40 °C) - 1 min<br>2200 A 104 °F (40 °C) - 10 min |
| Associated fuse rating                      | 1600 A gG at <= 440 V<br>800 A aM at <= 440 V  |
| Average impedance                           | 0.1 mOhm - Ith 1600 A 50 Hz  |
| [Ui] rated insulation voltage               | 1000 V IEC 60947-4-1<br>1500 V VDE 0110 group C  |
| Power dissipation per pole                  | 250 W AC-1<br>60 W AC-3  |
| Overvoltage category                        | III  |
| power pole contact composition              | 3 NO   |

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

|  |   |
|--|---|
| <b>Motor power kW</b>                  | 450 kW at 1000 V AC 50/60 Hz (AC-3)<br>400 kW at 380...400 V AC 50/60 Hz (AC-3)<br>425 kW at 415 V AC 50/60 Hz (AC-3)<br>425 kW at 440 V AC 50/60 Hz (AC-3)<br>450 kW at 500 V AC 50/60 Hz (AC-3)<br>475 kW at 660...690 V AC 50/60 Hz (AC-3)<br>220 kW at 220...230 V AC 50/60 Hz (AC-3)<br>110 kW at 400 V AC 50/60 Hz (AC-4)   |
| <b>Control circuit voltage limits</b>  | Operational 0.85...1.1 Uc 40...400 Hz 131 °F (55 °C)<br>Drop-out 0.2...0.4 Uc 40...400 Hz 131 °F (55 °C))   |
| <b>Mechanical durability</b>           | 5 Mcycles   |
| <b>Inrush power in VA</b>              | 2100 VA, 40...400 Hz 0.9 68 °F (20 °C))   |
| <b>Hold-in power consumption in VA</b> | 50 VA, 40...400 Hz 0.9 68 °F (20 °C))   |
| <b>Maximum operating rate</b>          | 600 cyc/h 131 °F (55 °C)  |
| <b>Operating time</b>                  | 40...80 ms closing<br>130...230 ms opening  |
| <b>Connections - terminals</b>         | Control circuit screw clamp terminals 1 0.002...0.006 in <sup>2</sup> (1...4 mm <sup>2</sup> )flexible without cable end<br>Control circuit screw clamp terminals 2 0.002...0.006 in <sup>2</sup> (1...4 mm <sup>2</sup> )flexible without cable end<br>Control circuit screw clamp terminals 1 0.002...0.006 in <sup>2</sup> (1...4 mm <sup>2</sup> )flexible with cable end<br>Control circuit screw clamp terminals 2 0.002...0.004 in <sup>2</sup> (1...2.5 mm <sup>2</sup> )flexible with cable end<br>Control circuit screw clamp terminals 1 0.002...0.006 in <sup>2</sup> (1...4 mm <sup>2</sup> )solid without cable end<br>Control circuit screw clamp terminals 2 0.002...0.006 in <sup>2</sup> (1...4 mm <sup>2</sup> )solid without cable end<br>Power circuit bar 2 100 x 5 mm<br>Power circuit bolted connection |
| <b>Tightening torque</b>               | Control circuit 10.6 lbf.in (1.2 N.m)<br>Power circuit 513.3 lbf.in (58 N.m)  |
| <b>Mounting Support</b>                | Plate   |
| <b>Heat dissipation</b>                | 44 W  |
| <b>motor power range</b>               | 250...500 kW 380...440 V 3 phase<br>110...220 kW 200...240 V 3 phase<br>250...500 kW 480...500 V 3 phase  |
| <b>Motor starter type</b>              | Direct on-line contactor  |
| <b>Contactor coil voltage</b>          | 110 V AC standard<br>120 V AC standard  |
| <b>Standards</b>                       | EN 60947-1<br>JIS C8201-4-1<br>IEC 60947-4-1<br>IEC 60947-1<br>EN 60947-4-1   |
| <b>Product Certifications</b>          | UL<br>RINA<br>ABS<br>CB<br>RMRoS<br>CSA<br>LROS (Lloyds register of shipping)<br>DNV<br>BV<br>UKCA  |
| <b>Compatibility code</b>              | LC1F  |
| <b>Control circuit type</b>            | AC 40...400 Hz  |

## Environment

|                                |   |
|--------------------------------|---|
| <b>IP degree of protection</b> | IP20 front face with shrouds IEC 60529<br>IP20 front face with shrouds VDE 0106 |
|--------------------------------|---|

|  |                                      |
|--|--------------------------------------|
| <b>Protective treatment</b>                                  | TH                                   |
| <b>Ambient air temperature for operation</b>                 | 23...131 °F (-5...55 °C)             |
| <b>Ambient Air Temperature for Storage</b>                   | -76...176 °F (-60...80 °C)           |
| <b>Permissible ambient air temperature around the device</b> | -40...158 °F (-40...70 °C)           |
| <b>Height</b>  | 17.09 in (434 mm)                    |
| <b>Width</b>   | 27.6 in (702 mm)                     |
| <b>Depth</b>   | 10.04 in (255 mm)                    |
| <b>Operating altitude</b>                                    | 9842.52 ft (3000 m) without derating |
| <b>Net Weight</b>  | 87.08 lb(US) (39.5 kg)               |

## Ordering and shipping details

|                          |               |
|--------------------------|---------------|
| <b>Category</b>          | US10I1222336  |
| <b>Discount Schedule</b> | 0I12          |
| <b>GTIN</b>              | 3389110227246 |
| <b>Returnability</b>     | No            |
| <b>Country of origin</b> | CZ            |

## Packing Units

|                                     |                         |
|-------------------------------------|-------------------------|
| <b>Unit Type of Package 1</b>       | PCE                     |
| <b>Nbr. of units in pkg.</b>        | 1                       |
| <b>Package 1 Height</b>             | 15.7 in (40.0 cm)       |
| <b>Package 1 Width</b>              | 17.5 in (44.5 cm)       |
| <b>Package 1 Length</b>             | 37.4 in (95.0 cm)       |
| <b>Package weight(Lbs)</b>          | 125.7 lb(US) (57.0 kg)  |
| <b>Unit Type of Package 2</b>       | PAL                     |
| <b>Number of Units in Package 2</b> | 2                       |
| <b>Package 2 Height</b>             | 76.8 in (195.0 cm)      |
| <b>Package 2 Width</b>              | 47.2 in (120.0 cm)      |
| <b>Package 2 Length</b>             | 31.5 in (80.0 cm)       |
| <b>Package 2 Weight</b>             | 310.9 lb(US) (141.0 kg) |

## Contractual warranty

|                 |           |
|-----------------|-----------|
| <b>Warranty</b> | 18 months |
|-----------------|-----------|



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

## Environmental footprint

|  |   |
|--|---|
| Carbon footprint (kg CO2 eq, Total Life cycle) | 7135  |
| Environmental Disclosure                       | <a href="#">Product Environmental Profile</a> |

## Use Better

### Materials and Substances

|  |  |
|--|--|
| Packaging made with recycled cardboard | Yes  |
| Packaging without single use plastic   | No   |
| <a href="#">EU RoHS Directive</a>      | Compliant with Exemptions  |
| REACH Regulation                       | <a href="#">REACH Declaration</a>  |
| California proposition 65              | <b>WARNING:</b> This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="#">www.P65Warnings.ca.gov</a> |

## Use Again


### Repack and remanufacture

|                               |  |
|-------------------------------|--|
| Recyclability potential, in % | 92   |
| Circularity Profile           | <a href="#">End of Life Information</a>  |
| Take-back                     | No   |
| WEEE Label                    | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins. |

## Dimensions Drawings

## Dimensions and Drawings

## LC1 F780

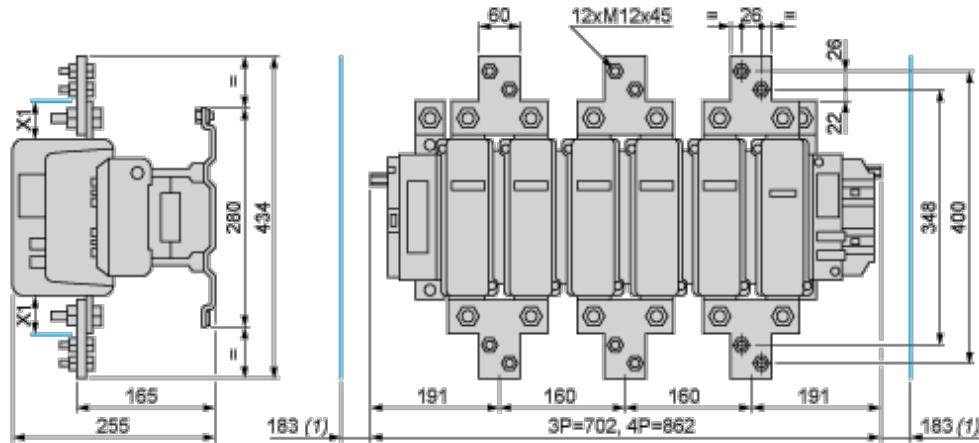


(1) Minimum distance required for coil removal.

**NOTE: X1 (mm) = Minimum electrical clearance according to operating voltage and breaking capacity.**

| Voltage | 200...500 V | 690...1000 V |
|---------|-------------|--------------|
| X1 (mm) | 30          | 35           |


## Fixing centers of LC1 F780

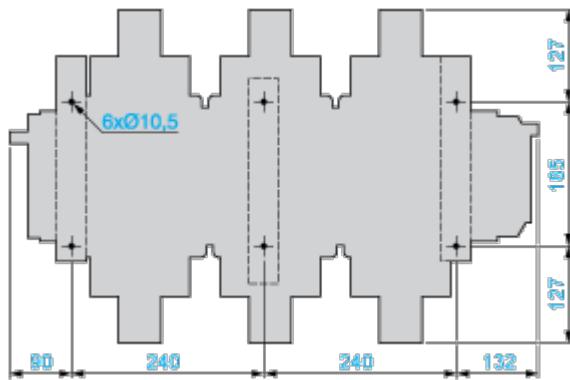

## Connections and Schema

Connections and Schema

---

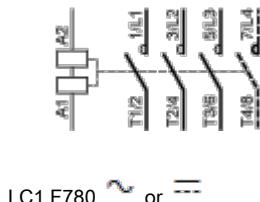

## Technical Illustration

## Assembly's dimensions

