

# Product data sheet

Specifications

## TeSys Deca - auxiliary contact - 2 NO



GVAE20

**Product availability: Stock - Normally stocked in distribution facility**

### Main

Range	TeSys TeSys Deca
Device short name	GVAE
Product or Component Type	Auxiliary contact block
Product Compatibility	GV2L GV3P GV2ME LS1D32 GV3L GV2RT GV2P GV2LE
Mounting Location	Front side
Pole contact composition	2 NO
Quantity per Set	Set of 10

### Complementary

[Ui] rated insulation voltage	300 V UL 508 300 V CSA C22.2 No 14 250 V IEC 60947-1
[Ue] rated operational voltage	24...240 V AC 24...60 V DC
[Ith] conventional free air thermal current	2.5 A
Mechanical durability	100000 cycles
Minimum switching current	5 mA
Minimum switching voltage	17 V
Protection type	GG fuse 10 A GB2CB06 circuit breaker 10 A
Rated operational power in VA	120 VA 110...120 V AC-15 100000 cycles 120 VA 230...240 V AC-15 100000 cycles 48 VA 24 V AC-15 100000 cycles 60 VA 48 V AC-15 100000 cycles
Rated operational power in W	15 W 48 V DC-13 100000 cycles 24 W 24 V DC-13 100000 cycles 9 W 60 V DC-13 100000 cycles
Tightening torque	12.4 lbf.in (1.4 N.m) screw clamp terminals
Height	0.4 in (11 mm)
Width	1.8 in (45 mm)
Depth	1.1 in (29 mm)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

---

Net Weight	0.04 lb(US) (0.02 kg)
------------	-----------------------

## Environment

---

Environmental characteristic	Normal environment
------------------------------	--------------------

---

Product Certifications	UKCA
------------------------	------

## Ordering and shipping details

---

Category	US10I1122367
----------	--------------

---

Discount Schedule	0I11
-------------------	------

---

GTIN	3389110343465
------	---------------

---

Returnability	Yes
---------------	-----

---

Country of origin	CZ
-------------------	----

## Packing Units

---

Unit Type of Package 1	PCE
------------------------	-----

---

Nbr. of units in pkg.	1
-----------------------	---

---

Package 1 Height	0.6 in (1.6 cm)
------------------	-----------------

---

Package 1 Width	2.0 in (5 cm)
-----------------	---------------

---

Package 1 Length	2.4 in (6 cm)
------------------	---------------

---

Package weight(Lbs)	0.7 oz (19 g)
---------------------	---------------

---

Unit Type of Package 2	BB1
------------------------	-----

---

Number of Units in Package 2	10
------------------------------	----

---

Package 2 Height	2.5 in (6.3 cm)
------------------	-----------------

---

Package 2 Width	2.9 in (7.3 cm)
-----------------	-----------------

---

Package 2 Length	4.7 in (12 cm)
------------------	----------------

---

Package 2 Weight	7.4 oz (209 g)
------------------	----------------

---

Unit Type of Package 3	S02
------------------------	-----

---

Number of Units in Package 3	220
------------------------------	-----

---

Package 3 Height	5.9 in (15 cm)
------------------	----------------

---

Package 3 Width	11.8 in (30 cm)
-----------------	-----------------

---

Package 3 Length	15.7 in (40 cm)
------------------	-----------------

---

Package 3 Weight	9.650 lb(US) (4.377 kg)
------------------	-------------------------

## Contractual warranty

---

---

Warranty	18 months
----------	-----------

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

## Environmental footprint

Carbon footprint (kg CO<sub>2</sub> eq, Total Life cycle) **1**

Environmental Disclosure [Product Environmental Profile](#)

## Use Better

### Materials and Substances

Packaging made with recycled cardboard **Yes**

Packaging without single use plastic **No**

[EU RoHS Directive](#) **Compliant**

REACH Regulation [REACH Declaration](#)

California proposition 65

**WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](#)**

## Use Again

### Repack and remanufacture

Circularity Profile [End of Life Information](#)

Take-back **No**

WEEE Label

 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Connections and Schema

---

GVAE20





Image of product / Alternate images

Alternative

---



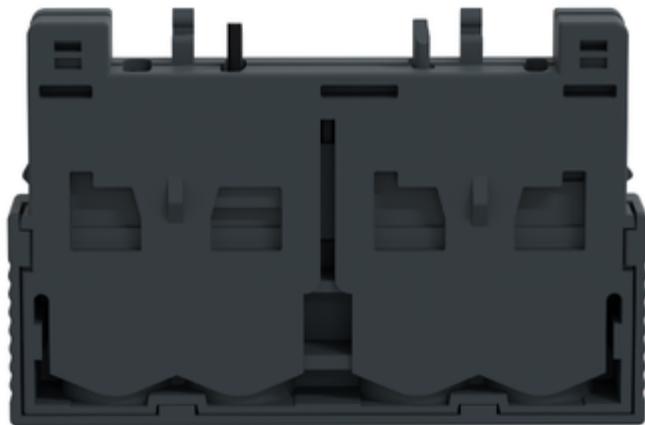

## Technical Illustration

### Assembly's dimensions

---

mm  
[in]

