

Product datasheet

Specifications



motor voltage and temperature control relay - RM35-T - 24..240 V AC/DC - 2 NO

RM35TM250MW

Main

Range of product	Harmony Control Relays
Relay type	Motor temperature control relay
Product or component type	Motor temperature control relay
Relay name	RM35TM
Relay monitored parameters	Phase failure detection Phase sequence Test/reset button Motor temperature via PTC probe Selection (with or without memory)
Measurement range	208...480 V AC 15...3100 Ohm
Time delay type	Without
Output contacts	2 NO
nominal output current	5 A
Contacts type and composition	2 NO
[Uc] control circuit voltage	24...240 V
Product specific application	For 3-phase supply

Complementary

[Us] rated supply voltage	24...240 V AC/DC 50/60 Hz, non self-powered
Supply voltage limits	20.4...264 V AC 20.4...264 V DC
Reset time	10000 ms output
Maximum switching voltage	250 V AC 250 V DC
Switching capacity in VA	1250 VA
Minimum switching current	10 mA at 5 V DC
Maximum switching current	5 A AC 5 A DC
Power consumption in VA	0...4 VA at 24...240 V AC
Maximum power consumption in W	0.5 W DC
Control circuit frequency	50...60 Hz +/- 10 %
Resistance across terminals	602 mOhm
Measurement voltage limits	176...528 V AC
delay at power up	500 ms

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Voltage range	176...528 V
Response time	> 50 ms (input Y1 (contact Y1-T1) and push-button)
[Uc] control circuit voltage	<= 3.6 V of temperature control circuit (T1-T2 terminals open)
Short-circuit current	0.007 A temperature sensing circuit (T1-T2 terminals short circuited)
Maximum resistance	1500 Ohm for temperature sensor at 20 °C
Tripping threshold	3100 Ohm +/- 10 % for temperature control circuit
Reset threshold	1650 Ohm +/- 10 % for temperature control circuit
Insulation resistance	> 500 MOhm at 500 V DC between supply and relay output conforming to IEC 60255-5 > 500 MOhm at 500 V DC between measurement and relay output conforming to IEC 60664-1 > 1 MOhm at 500 V DC between supply and measurement conforming to IEC 60255-5 > 500 MOhm at 500 V DC between supply and relay output conforming to IEC 60664-1 > 500 MOhm at 500 V DC between measurement and relay output conforming to IEC 60255-5 > 1 MOhm at 500 V DC between supply and measurement conforming to IEC 60664-1
[Ui] rated insulation voltage	400 V conforming to IEC 60664-1
Supply frequency	50/60 Hz +/- 10 %
Operating position	Any position without derating
Connections - terminals	Screw terminals, 1 x 0.5...1 x 4 mm ² (AWG 20...AWG 11) solid without cable end Screw terminals, 2 x 0.5...2 x 2.5 mm ² (AWG 20...AWG 14) solid without cable end Screw terminals, 1 x 0.2...1 x 2.5 mm ² (AWG 24...AWG 12) flexible with cable end Screw terminals, 2 x 0.2...2 x 1.5 mm ² (AWG 24...AWG 16) flexible with cable end
Tightening torque	0.6...1 N.m conforming to IEC 60947-1
Housing material	Self-extinguishing plastic
Local signalling	LED (green) for power ON LED (yellow) for phase of relay (R2) LED (yellow) for temperature of relay (R1)
Mounting support	35 mm symmetrical DIN rail conforming to IEC 60715
Electrical durability	10000 cycles
Mechanical durability	30000000 cycles
Operating rate	<= 360 operations/hour full load
Utilisation category	AC-12 conforming to IEC 60947-5-1 AC-13 conforming to IEC 60947-5-1 AC-14 conforming to IEC 60947-5-1 AC-15 conforming to IEC 60947-5-1 DC-12 conforming to IEC 60947-5-1 DC-13 conforming to IEC 60947-5-1
Width	35 mm
Net weight	0.13 kg
Control type	With test button

Environment

Immunity to microbreaks	20 ms at 20.4 V
Electromagnetic compatibility	Emission standard for industrial environments conforming to IEC 61000-6-4 Emission standard for residential, commercial and light-industrial environments conforming to IEC 61000-6-3 Immunity for industrial environments conforming to IEC 61000-6-2
Standards	IEC 60255-6 IEC 60034-11-2

Product certifications	CSA C-Tick GOST UL GL
Marking	CE
Directives	73/23/EEC - low voltage directive 89/336/EEC - electromagnetic compatibility
Ambient air temperature for storage	-40...70 °C
Ambient air temperature for operation	-20...50 °C
Relative humidity	95 % at 55 °C conforming to IEC 60068-2-30
Vibration resistance	0.35 mm (f= 5...57.6 Hz) conforming to IEC 60068-2-6 1 gn (f= 57.6...150 Hz) conforming to IEC 60255-21-1
Shock resistance	15 gn for 11 ms conforming to IEC 60255-21-1
IP degree of protection	IP20 (terminals) conforming to IEC 60529 IP30 (casing) conforming to IEC 60529
Pollution degree	3 conforming to IEC 60664-1
Overvoltage category	III conforming to IEC 60664-1
Dielectric test voltage	2 kV, 1 min AC 50 Hz
Non-dissipating shock wave	4 kV

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	8.000 cm
Package 1 Width	4.500 cm
Package 1 Length	9.500 cm
Package 1 Weight	130.000 g
Unit Type of Package 2	S03
Number of Units in Package 2	48
Package 2 Height	30.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	6.969 kg

Contractual warranty

Warranty (in months)	18
-----------------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Total lifecycle Carbon footprint	29
Environmental Disclosure	Product Environmental Profile

Use Better

Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
REACH Regulation	REACH Declaration

Use Longer

Lifetime extension

Repair	No
--------	----

Use Again


Repack and remanufacture

End of life manual availability	End of Life Information
Take-back	No

Dimensions Drawings

3-Phase Supply and Motor Temperature Control Relays


Dimensions and Mounting

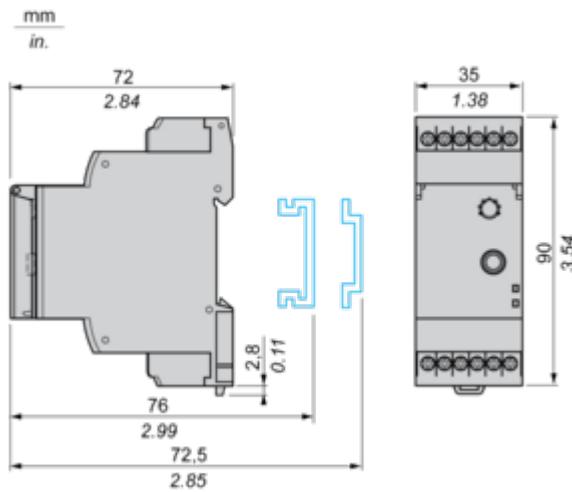

Connections and Schema

3-Phase Supply and Motor Temperature Control Relays



Wiring Diagram

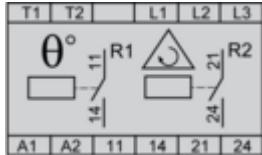

Technical Description

Function Diagrams

Phase Sequence Control and Phase Failure Detection (U measured < 0.7 x nominal supply voltage)

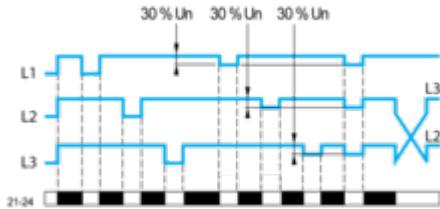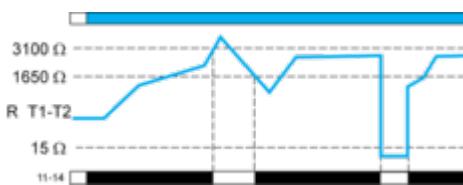**Motor Temperature Control via PTC Probe****Legend**

- Un Nominal 3-phase supply voltage
- R T1-T2 Resistance between terminals T1 and T2
- 11-14 R1 output relay connections
- Relay status: black color = energized.


NOTE: The temperature control relay can take up to 6 PTC (positive temperature coefficient) probes wired in series between terminals T1 and T2.

Function Diagrams

Motor Temperature Control via PTC Probe

As soon as the temperature returns to the correct value, the relay can be unlocked (reset), either by pressing the "Test/Reset" button (for at least 200 ms), or by closing a volt-free contact (for at least 200 ms) between terminal Y1 and T1 (without a parallel load). When a fault is detected, the "temperature" output relay locks in the open position, even if the "Test/Reset" button is pressed.


With memory ("Memory" mode)

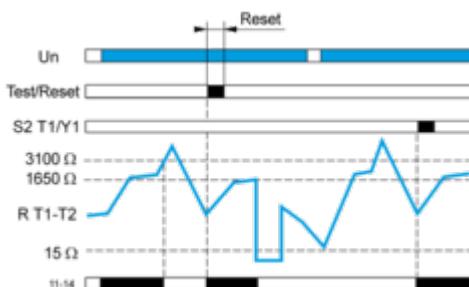


Use of the "Test/Reset" Button

When the temperature is normal, pressing the "Test/Reset" button simulates overheating, the "temperature" output relay contact is open.

Without memory ("No Memory" mode).

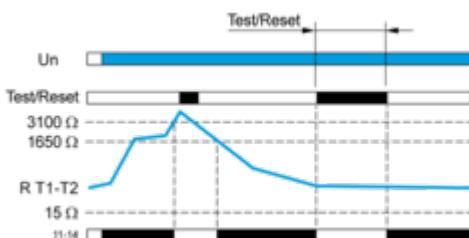

With memory ("Memory" mode)

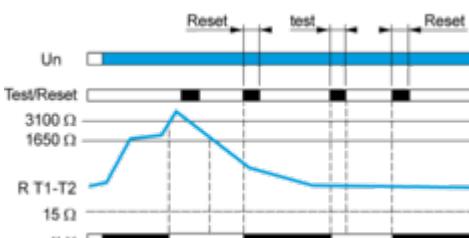

Legend

Un Nominal 3-phase supply voltage

R T1-T2 Resistance between terminals T1 and T2

11-14 R1 output relay connections


Relay status: black color = energized.

In "Memory" mode, "fault" indication is locked and the button must be released then pressed again to reset the function.

When a fault has been detected and the temperature has returned to normal, the "temperature" control relay can be unlocked (reset) by pressing the "Test/Reset" button.

Technical Illustration

Dimensions

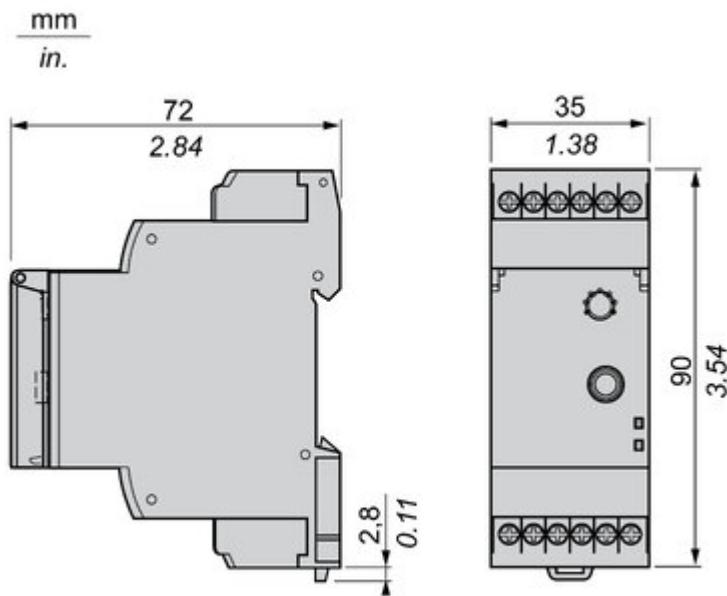

Offer Marketing Illustration

Product benefits / Features

Technical Benefits

Harmony Control Relay

Compliant with IEC 60255-1 standard, and a wide array of product certifications such as UL, CE, CSA, EAC.

Different product width to meet your needs:
17.5 mm/0.69 in.,
22.5 mm/0.88 in.,
35 mm/1.38 in.

Diagnostic button to check downstream circuit immediately, shorten the commission and troubleshooting time

Dust and unintended human intervention avoided thanks to the IP50 lead-sealable settings protection cover.

A Dial-Pointer LED indicator that enhances ease of operation in difficult environments such as dusty or low-light conditions



Offer Marketing Illustration

Product benefits / Features

Features

Harmony Control Relay



Wide monitoring parameters (phase, current, voltage, liquid level, frequency, speed, temperature, and pump control) to meet your application needs.

True RMS measurement that minimizes the possibility of unexpected trips from highly polluted networks (except RM17TG and RM22TG)

Experience unprecedented accuracy, predictive maintenance, and superior security.

Green Premium labelled products, promising compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ product

Compatible with a wide range of applications, such as hoisting, packaging, lifts, textile, pumping, and water.

Image of product / Alternate images

Alternative

