

# Product data sheet

Specifications



## TeSys Deca, thermal overload relay, 23 to 32 A, class 10A

LRD32

**Product availability:** Stock - Normally stocked in distribution facility

### Main

Range	TeSys TeSys Deca
Product name	TeSys LRD TeSys Deca
Product or Component Type	Differential thermal overload relay
Device short name	LRD
Relay application	Motor protection
Product Compatibility	LC1D32 LC1D25 LC1D38
Network type	AC DC
Thermal overload class	Class 10A IEC 60947-4-1
Thermal protection adjustment range	23...32 A
[Ui] rated insulation voltage	Power circuit 600 V CSA Power circuit 600 V UL Power circuit 690 V IEC 60947-4-1

### Complementary

Network Frequency	0...400 Hz
Mounting support	Plate, with specific accessories Rail, with specific accessories Under contactor
Tripping threshold	1.14 +/- 0.06 Ir IEC 60947-4-1
Auxiliary contact composition	1 NO + 1 NC
[Ith] conventional free air thermal current	5 A signalling circuit
Permissible current	1.5 A 240 V AC-15 signalling circuit 0.1 A 250 V DC-13 signalling circuit
[Ue] rated operational voltage	690 V AC 0...400 Hz power circuit IEC 60947-4-1
Associated fuse rating	4 A gG for signalling circuit 4 A BS for signalling circuit
[Uimp] rated impulse withstand voltage	6 kV
Phase failure sensitivity	Tripping current 130 % of Ir on two phase, the last one at 0
Control type	Red push-button stop Blue push-button reset
Temperature compensation	-4...140 °F (-20...60 °C)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

<b>Connections - terminals</b>	Control circuit screw clamp terminals 2 0.002...0.004 in <sup>2</sup> (1...2.5 mm <sup>2</sup> ) flexible without cable end Control circuit screw clamp terminals 2 0.002...0.004 in <sup>2</sup> (1...2.5 mm <sup>2</sup> ) flexible with cable end Control circuit screw clamp terminals 2 0.002...0.004 in <sup>2</sup> (1...2.5 mm <sup>2</sup> ) solid Power circuit screw clamp terminals 1 0.002...0.02 in <sup>2</sup> (1.5...10 mm <sup>2</sup> ) flexible without cable end Power circuit screw clamp terminals 1 0.002...0.009 in <sup>2</sup> (1...6 mm <sup>2</sup> ) flexible with cable end Power circuit screw clamp terminals 1 0.002...0.02 in <sup>2</sup> (1.5...10 mm <sup>2</sup> ) solid
<b>Tightening torque</b>	Control circuit 15.05 lbf.in (1.7 N.m) screw clamp terminals Power circuit 22.1 lbf.in (2.5 N.m) screw clamp terminals
<b>Height</b>	2.6 in (66 mm)
<b>Width</b>	1.8 in (45 mm)
<b>Depth</b>	2.8 in (70 mm)
<b>Net Weight</b>	0.273 lb(US) (0.124 kg)

## Environment

<b>Climatic withstand</b>	IACS E10
<b>IP degree of protection</b>	IP20 conforming to IEC 60529
<b>Ambient air temperature for operation</b>	-4...140 °F (-20...60 °C) without derating IEC 60947-4-1
<b>Ambient Air Temperature for Storage</b>	-76...158 °F (-60...70 °C)
<b>Flame retardance</b>	V1 conforming to UL 94
<b>Mechanical robustness</b>	Vibrations6 Gn IEC 60068-2-6 Shocks15 Gn for 11 ms IEC 60068-2-7
<b>Dielectric strength</b>	1.89 kV 50 Hz IEC 60947-1
<b>Standards</b>	EN/IEC 60947-4-1 EN/IEC 60947-5-1 UL 60947-4-1 UL 60947-5-1 CSA C22.2 No 60947-4-1 CSA C22.2 No 60947-5-1 GB/T 14048.4 GB/T 14048.5 EN 50495
<b>Product Certifications</b>	IEC UL CSA CCC EAC BV RINA DNV-GL LROS (Lloyds register of shipping) ATEX INERIS UKCA

## Ordering and shipping details

<b>Category</b>	US10I1222347
<b>Discount Schedule</b>	0I12
<b>GTIN</b>	3389110346855
<b>Returnability</b>	Yes
<b>Country of origin</b>	FR

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Nbr. of units in pkg.</b>	1
<b>Package 1 Height</b>	2.165 in (5.500 cm)
<b>Package 1 Width</b>	2.795 in (7.100 cm)
<b>Package 1 Length</b>	3.150 in (8.000 cm)
<b>Package weight(Lbs)</b>	4.938 oz (140.000 g)
<b>Unit Type of Package 2</b>	S02
<b>Number of Units in Package 2</b>	24
<b>Package 2 Height</b>	5.906 in (15.000 cm)
<b>Package 2 Width</b>	11.811 in (30.000 cm)
<b>Package 2 Length</b>	15.748 in (40.000 cm)
<b>Package 2 Weight</b>	8.208 lb(US) (3.723 kg)

## Contractual warranty

<b>Warranty (in months)</b>	18
-----------------------------	----



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

## Environmental footprint

Carbon footprint (kg CO<sub>2</sub> eq, Total Life cycle) **13**

Environmental Disclosure [Product Environmental Profile](#)

## Use Better

### Materials and Substances

Packaging made with recycled cardboard **Yes**

Packaging without single use plastic **No**

[EU RoHS Directive](#) **Compliant**

SCIP Number **224fb0ea-2bc1-482e-b6b4-c1bdd9779659**

REACH Regulation [REACH Declaration](#)

California proposition 65  
WARNING: This product can expose you to chemicals including: Antimony oxide & Antimony trioxide, which is known to the State of California to cause cancer. For more information go to [www.P65Warnings.ca.gov](#)

## Use Again

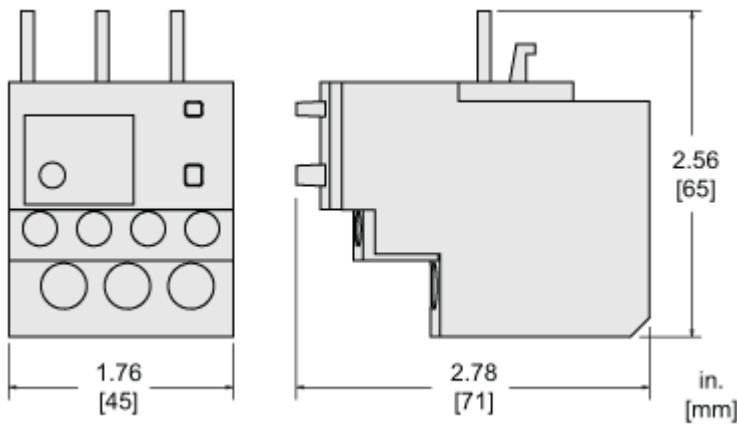
### Repack and remanufacture

Circularity Profile [End of Life Information](#)

Take-back **No**

WEEE Label The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

## Dimensions Drawings

Approximate Dimensions

Offer Marketing Illustration

**Product benefits / Features**

---



## TeSys Deca Thermal Overload Relays Range Accessories



Terminal block



Electrical remote stop



Mechanical  
remote control



Pre-wiring kit



Manual overload  
reset push-button

## Offer Marketing Illustration

## Product benefits / Features

## TeSys Deca

### Thermal Overload Relays

**Easy application**

Selectable manual, remote or auto reset tripping options for better process management.

**Simple to install**

Self-powering eliminates the need for an external power supply.

**Compatibility**

Can be combined with TeSys Deca contactors to form an extremely compact starter

Image of product / Alternate images

Alternative

---



