

Product datasheet

Specifications



Extended rotary handle kit, TeSys GV3, IP65, red handle, without trip indication, for GV3L-GV3P

GV3APN04

Main

Range	TeSys
Device short name	GV3AP
Product or component type	Rotary handle kit
Accessory / separate part category	Control accessory
Handle colour	Red
Handle front plate colour	Yellow

Complementary

Product compatibility	GV3P GV3L
Rotary handle padlocking	Padlock in OFF position
Rotary handle mounting style	Extended
Locking options description	1 to 3 padlocks
Back/door distance	189...300 mm
Net weight	0.3 kg

Environment

Product certifications	CULus
IP degree of protection	IP65

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	6.800 cm
Package 1 Width	9.100 cm
Package 1 Length	37.200 cm
Package 1 Weight	360.000 g

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Total lifecycle Carbon footprint **30**

Environmental Disclosure [Product Environmental Profile](#)

Use Better

Materials and Substances

Packaging made with recycled cardboard **Yes**

Packaging without single use plastic **No**

[EU RoHS Directive](#) **Compliant with Exemptions**

SCIP Number **2057c252-f956-4ac1-a3d9-75119bc8a000**

REACH Regulation [REACH Declaration](#)

Use Again


Repack and remanufacture

End of life manual availability [End of Life Information](#)


Take-back **No**

WEEE Label The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins


Dimensions Drawings

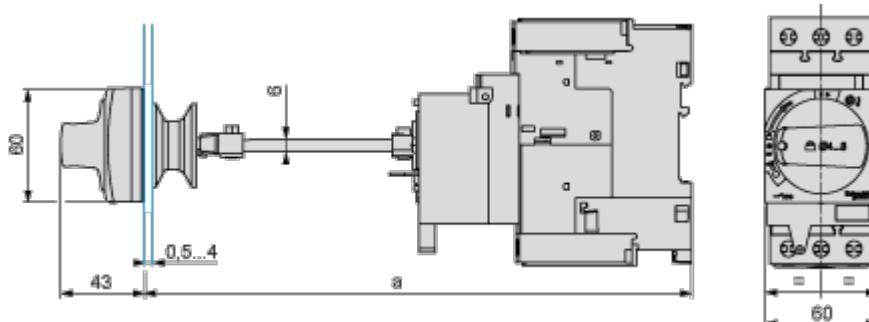Mounting**Mounting of External Operator GV3APN01, GV3APN02 or GV3APN04 for Motor Circuit Breakers GV3L**

Door cut-out

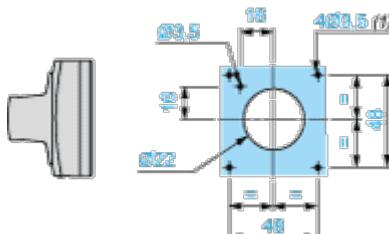


(1) For IP65 only.

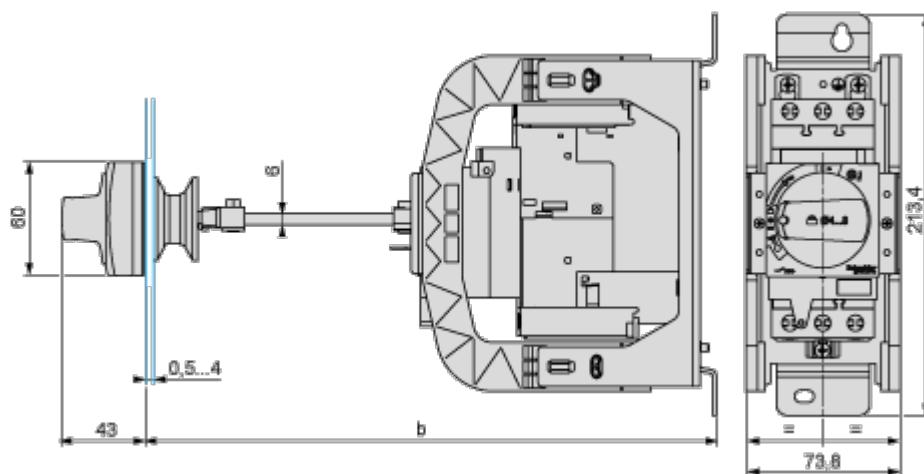Mounting of External Operator GVAPH03 for Motor Circuit Breakers GV3L

	b	
	Minimum	Maximum
GV3APN _{**} + GVAPH03	200	300
GV3APN _{**} + GVAPH03 + GVAPK12	300	492

Door cut-out

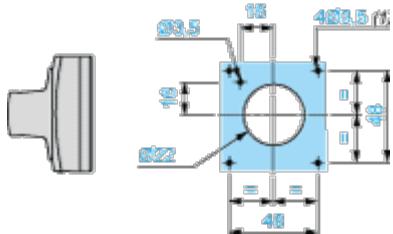

(1) For IP65 only.

Image of product / Alternate images

Alternative



